



## Technical Datasheet Arboseal GZ

Arboseal GZ is a flat section, preformed butyl strip. It deforms under moderate pressure and has appreciable surface tack and recovery.

### **Main Applications**

Recommended for use in compression joints in roofing and cladding, lap joints in guttering, glazing units into timber frames and glazing double glazed units into externally beaded metal frames.

#### *Caution:*

- i. Certain Hardwood finishes and treatments may cause softening of Arboseal GZ. Please contact Adshead Ratcliffe Technical Services Department for further information.*
- ii. Not recommended for use in expansion joints.*

### **Health and Safety.**

No known health hazards associated with this product. Please consult Material Safety Data Sheet for full information.

### **Technical Data**

Application Temperature: + 5° C to + 50° C

Service Temperature: - 25° C to + 50° C

Chemical Resistance: Fair resistance to most dilute acids and alkalis, vegetable oils and alcohol. Poor resistance to hydrocarbon solvents.

UV Resistance: Good

Service Life: 20 years+

Colours: Black, White, Teak

### **Accessories**

#### *Cleaners*

Arbo Cleaner No.17- 1 Litre Tin (Xylene based – not suitable for use with plastics or delicate finishes)

Arbo Cleaner No. 16 - 1 Litre Tin (Alcohol Based)



**Packaging:**

<b>Colour</b>	<b>Size</b>	<b>Number of Reels/Box</b>
White	10 x 3mm, 12 metres	20
Black	10 x 3mm, 12 metres	20
Teak	10 x 3mm, 12 metres	20
White	12 x 3mm, 12 metres	20
Black	12 x 3mm, 12 metres	20
Teak	12 x 3mm, 12 metres	20
White	15 x 3mm, 12 metres	16
Black	15 x 3mm, 12 metres	16
Teak	15 x 3mm, 12 metres	16
Black	18 x 3mm, 12 metres	12
Black	22 x 3mm, 12 metres	12
Black	35 x 3mm, 12 metres	8
Black	50 x 3mm, 12 metres	4
Black	50 x 6mm, 6 metres	4

**Important:** The information in this leaflet is given in good faith and based on results gained from experience and tests. However, all recommendations or suggestions are made without guarantee since the conditions of use are beyond our control. Goods are supplied subject to the Company's terms and conditions of sales, a copy of which is available on request.

Adshead Ratcliffe, Derby Road, Belper, Derbyshire DE56 1WJ, England.

**Telephone: 01773 826661**

**Fax: 01773 821215**

**Internet: [www.arbo.co.uk](http://www.arbo.co.uk)**




# ARBOSEAL INTUMESCENT TAPE

## DESCRIPTION

Arboseal Intumescent Tape is a flat section, preformed Intumescent strip based upon synthetic rubbers and carefully chosen fire resistant materials. It deforms under moderate pressure and has appreciable surface tack and recovery. When subject to flame, Arboseal Intumescent Tape will intumesce (expand and char) blocking the passage of fire and smoke.

## MAIN APPLICATIONS

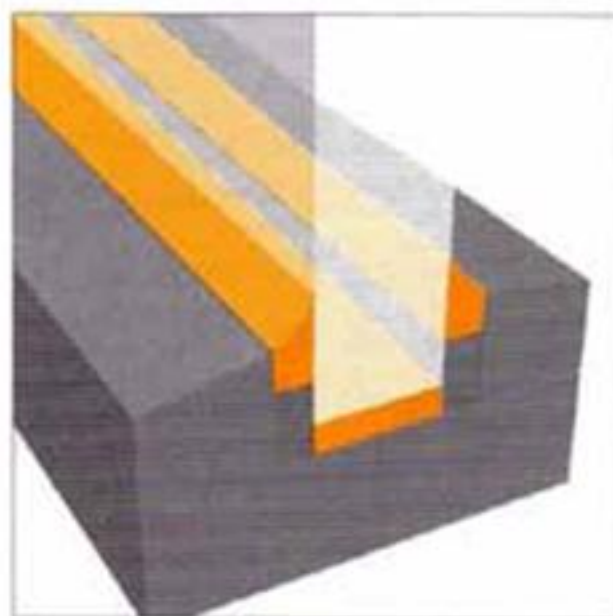

### *Low Movement Fire Seal*

Recommended for use in glazing internal and external FD30 timber fire doors and screens.

**NB:** Not recommended for external use without a sealant capping (please contact Adshead Ratcliffe Technical Service Department for further information.) Not recommended for use in expansion joints.

## SPECIFICATION COMPLIANCE

BS476 Part 22:1987;  
Warrington Report Number: C118002  
TRADA Report Number: IT349

## HEALTH AND SAFETY.

No known health hazards associated with this product. Please consult Material Safety Data Sheet for full information.

## TECHNICAL DATA

Application Temperature:	+ 5° C to + 50° C
Service Temperature:	- 25° C to + 50° C
Chemical Resistance:	Fair resistance to most dilute acids and alkalis, vegetable oils and alcohol. Poor resistance to hydrocarbon solvents.
UV Resistance:	Good
Service Life:	20 years+
Colours:	Teak, White

## PACKAGING

Size: 15mm x 3 mm x 12 metres per reel.

## STORAGE LIFE

12 months in original unopened packaging stored in a cool, dry place out of direct sunlight

## ACCESSORIES

### **Cleaners**

Arbo Cleaner No.17- 1 Litre Tin (Xylene based – not suitable for use with plastics or delicate finishes)

### **Cleaners**

Arbo Cleaner No. 16 - 1 Litre Tin (Alcohol Based)

**Important:** Important: The information in this leaflet is given in good faith and based on results gained from experience and tests. However, all recommendations or suggestions are made without guarantee since the conditions of use are beyond our control. Goods are supplied subject to the Company's terms and conditions of sales, a copy of which is available on request.

Arbo sealants are manufactured in the U.K. by Adshead Ratcliffe.